

Pilana

Mills

Drills



CONTENTS

CARBIDE END MILLS 2 TEETH	✓OR201, OR202	4
CARBIDE END MILLS 3 TEETH	✓OR301	5
CARBIDE END MILLS 4 TEETH	✓OR401, OR402	6
CARBIDE END MILLS 4 TEETH WITH HELIX 45°	✓OR452	7
CARBIDE END MILLS FOR HIGH SPEED CUTTING 4 TEETH	✓HSC401	8
CARBIDE END MILLS 4 TEETH WITH DOUBLE HELIX	✓OR411	9
CARBIDE END MILLS 4 TEETH WITH DOUBLE HELIX - INOX	✓NR411	10
CARBIDE END MILLS 4 TEETH WITH TRIPLE HELIX FOR ALUMINIUM	✓AR311	11
CARBIDE END MILLS 1 TEETH	* AR101, AR102	12
CARBIDE END MILLS ROUGHING 4 TEETH	✓OH401	13
CARBIDE END MILLS ROUGHING-FINISHING 4 TEETH	✓RF401	14
CARBIDE END MILLS FINISHING	✓OR601, OR602	15
CARBIDE FINISHING END MILLS FOR HARD MATERIALS	✓KR	16
CARBIDE BALL-NOSE END MILLS 2 TEETH	✓OK201, OK202	17
CARBIDE BALL-NOSE END MILLS 4 TEETH	✓OK401, OK402	18
CARBIDE BALL-NOSE END MILLS FOR HARD MATERIALS	✓KK201, KK202	19
CARBIDE BALL-NOSE END MILLS FOR EXTRA HARD MATERIALS	✓KK251, KK252	20
CARBIDE END MILLS WITH CORNER RADIUS 4 TEETH	✓KT401, KT402	21
CARBIDE NC SPOT DRILLS	✓NC090, NC120	22
CARBIDE DRILLS 3xD WITHOUT INTERNAL COOLING	* VS302	23
CARBIDE DRILLS 5xD WITH INTERNAL COOLING	(✓ VS501	24
CARBIDE MICRO DRILLS 5xD WITHOUT INTERNAL COOLING	* VM502	25

✓ in stock
* production on request

CONTENTS

CARBIDE DRILLS 8xD WITH INTERNAL COOLING	* VS801	26
CARBIDE DRILLS 12xD WITH INTERNAL COOLING	* VS1201	27
CARBIDE DRILLS 4xD FOR HARD MATERIALS	* VK402	28
CARBIDE CHAMFER MILLS SINGLE END 90°	✓ JS401	29
CARBIDE CHAMFER MILLS DOUBLE END 90°	✓ OS401, OS402	30
SPECIAL CARBIDE TOOLS	*	31
RECOMMENDED CUTTING CONDITIONS FOR CARBIDE END MILLS		33

✓ in stock
* production on request

CARBIDE END MILLS

2 TEETH

OR201

OR202

Recommended for use:

< 55 HRC | < 1600 N/mm² | steel | stainless steels | cast iron | copper

Applicable:


aluminium

Coating:

AlTiN

Geometry:

λ 30°, γ 8°

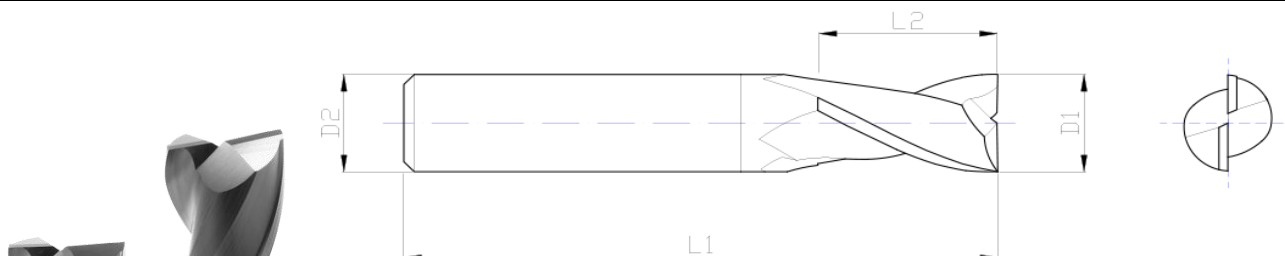

Catalogue number	Number of teeth Z	Diameter D1 h10	Corner edge K x 45°	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
OR201.010	2	1	0,02	38	4	-	-	3
OR201.020	2	2	0,05	38	7	-	-	3
OR202.020	2	2	0,05	50	12	-	-	3
OR201.030	2	3	0,07	38	7	-	-	3
OR202.030	2	3	0,07	50	12	-	-	3
OR201.040	2	4	0,07	50	8	-	-	4
OR202.040	2	4	0,07	60	15	-	-	4
OR201.050	2	5	0,07	50	10	-	-	5
OR202.050	2	5	0,07	60	20	-	-	5
OR201.060	2	6	0,07	57	10	-	-	6
OR202.060	2	6	0,07	60	20	-	-	6
OR201.080	2	8	0,12	63	16	-	-	8
OR202.080	2	8	0,12	70	25	-	-	8
OR201.100	2	10	0,2	72	19	-	-	10
OR202.100	2	10	0,2	110	30	-	-	10
OR201.120	2	12	0,2	83	22	-	-	12
OR202.120	2	12	0,2	110	30	-	-	12
OR201.140	2	14	0,2	83	22	-	-	14
OR202.140	2	14	0,2	110	40	-	-	14
OR201.160	2	16	0,2	92	26	-	-	16
OR202.160	2	16	0,2	110	50	-	-	16
OR201.180	2	18	0,2	92	26	-	-	18
OR202.180	2	18	0,2	110	50	-	-	18
OR201.200	2	20	0,3	104	32	-	-	20
OR202.200	2	20	0,3	110	55	-	-	20

Cutting conditions on page 33.

CARBIDE END MILLS

3 TEETH

OR301

Recommended for use:

< 55 HRc | < 1600 N/mm² | steel | stainless steels | cast iron | copper

Applicable:


aluminium

Coating:

AlTiN

Geometry:

λ 30°, γ 8°

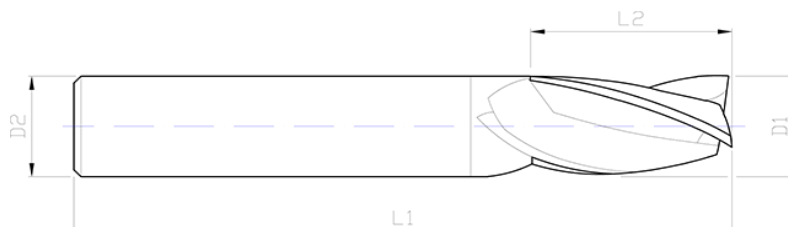

Catalogue number	Number of teeth Z	Diameter D1 h10	Corner edge K x 45°	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
OR301.030	3	3	0,07	38	7	-	-	3
OR301.040	3	4	0,07	50	8	-	-	4
OR301.050	3	5	0,07	50	10	-	-	5
OR301.060	3	6	0,07	57	10	-	-	6
OR301.080	3	8	0,12	63	16	-	-	8
OR301.100	3	10	0,2	72	19	-	-	10
OR301.120	3	12	0,2	83	22	-	-	12
OR301.140	3	14	0,2	83	22	-	-	14
OR301.160	3	16	0,2	92	26	-	-	16
OR301.180	3	18	0,2	92	26	-	-	18
OR301.200	3	20	0,3	104	32	-	-	20

Cutting conditions on page 33.

CARBIDE END MILLS

4 TEETH

OR401

OR402

Recommended for use:

< 55 HRc | < 1600 N/mm² | steel | stainless steels | cast iron | copper

Applicable:


aluminium

Coating:

AlTiN

Geometry:

λ 30°, γ 8°

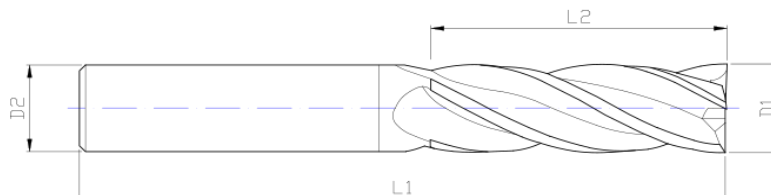

Catalogue number	Number of teeth Z	Diameter D1 h10	Corner edge K x 45°	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
OR401.030	4	3	0,07	38	10	-	-	3
OR402.030	4	3	0,07	65	20	-	-	3
OR401.040	4	4	0,07	50	11	-	-	4
OR402.040	4	4	0,07	65	25	-	-	4
OR401.050	4	5	0,07	50	13	-	-	5
OR402.050	4	5	0,07	70	30	-	-	5
OR401.060	4	6	0,07	57	13	-	-	6
OR402.060	4	6	0,07	70	30	-	-	6
OR401.080	4	8	0,12	63	19	-	-	8
OR402.080	4	8	0,12	100	40	-	-	8
OR401.100	4	10	0,2	72	22	-	-	10
OR402.100	4	10	0,2	110	40	-	-	10
OR401.120	4	12	0,2	83	26	-	-	12
OR402.120	4	12	0,2	110	45	-	-	12
OR401.140	4	14	0,2	83	26	-	-	14
OR402.140	4	14	0,2	110	45	-	-	14
OR401.160	4	16	0,2	92	32	-	-	16
OR402.160	4	16	0,2	124	65	-	-	16
OR401.180	4	18	0,2	92	32	-	-	18
OR402.180	4	18	0,2	124	65	-	-	18
OR401.200	4	20	0,3	104	38	-	-	20
OR402.200	4	20	0,3	150	65	-	-	20
OR402.250	4	25	0,3	165	80	-	-	25

Cutting conditions on page 33.

CARBIDE END MILLS

4 TEETH WITH HELIX 45°

OR452

Recommended for use:

< 60 HRc | < 1600 N/mm² | steel | stainless steels | cast iron

Applicable:


aluminium

Coating:

AlCrN

Geometry:

$\lambda 45^\circ, \gamma 8^\circ$

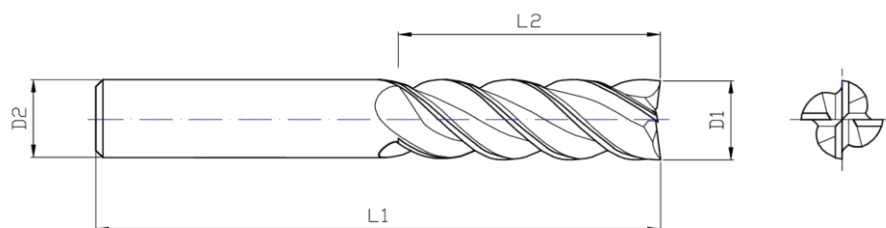

Catalogue number	Number of teeth Z	Diameter D1 h10	Corner edge K x 45°	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
OR452.040	4	4	0,07	50	10	-	-	4
OR452.060	4	6	0,07	62	18	-	-	6
OR452.080	4	8	0,12	70	24	-	-	8
OR452.100	4	10	0,2	80	30	-	-	10
OR452.120	4	12	0,2	90	36	-	-	12
OR452.140	4	14	0,2	100	42	-	-	14
OR452.160	4	16	0,2	110	48	-	-	16
OR452.200	4	20	0,3	124	65	-	-	20

Cutting conditions on page 33.

CARBIDE END MILLS

FOR HIGH SPEED CUTTING 4 TEETH

HSC401

Recommended for use:



< 55 HRc | < 1600 N/mm² | steel | stainless steels | cast iron

Coating:

AlTiN

Geometry:

$\lambda 45^\circ \gamma 4^\circ$

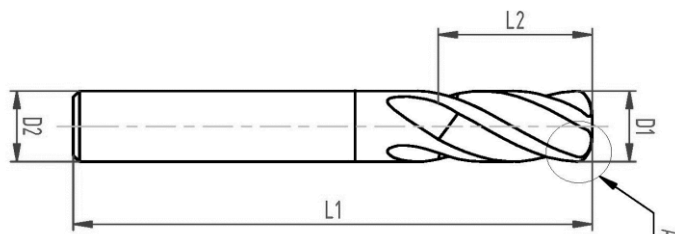

Catalogue number	Number of teeth Z	Diameter D1 +/-0,01	Corner radius R	Overall length L1	Length of edge L2	Shank diameter D2 h6	R/CAM	Cutting depth a _p
HSC401.040	4	4	0,5	57	11	6	0,67	0,2
HSC401.060	4	6	0,5	57	15	6	0,76	0,3
HSC401.080	4	8	1	63	20	8	1,38	0,5
HSC401.100	4	10	1,5	72	26	10	1,99	0,7
HSC401.120	4	12	1,5	83	30	12	2,1	0,8
HSC401.160	4	16	2	92	36	16	2,75	1

General construction steels <600Nmm ²												
D	ø 4	ø 4	ø 6	ø 6	ø 8	ø 8	ø 10	ø 10	ø 12	ø 12	ø 16	ø 16
ap (mm)	0.2	-	0.3	-	0.4	-	0.45	-	0.5	-	0.65	-
	-	0.15	-	0.2	-	0.3	-	0.4	-	0.45	-	0.5
Vc (mm/min)	65	-	65	-	65	-	65	-	65	-	65	-
	-	130	-	130	-	130	-	130	-	130	-	130
fz (mm/z)	0.2	-	0.35	-	0.45	-	0.5	-	0.6	-	0.8	-
	-	0.2	-	0.35	-	0.45	-	0.5	-	0.6	-	0.8

Alloyed steels <1100Nmm ²												
D	ø 4	ø 4	ø 6	ø 6	ø 8	ø 8	ø 10	ø 10	ø 12	ø 12	ø 16	ø 16
ap (mm)	0.2	-	0.3	-	0.4	-	0.45	-	0.5	-	0.65	-
	-	0.15	-	0.2	-	0.3	-	0.4	-	0.45	-	0.5
Vc (mm/min)	60	-	60	-	60	-	60	-	60	-	60	-
	-	120	-	120	-	120	-	120	-	120	-	120
fz (mm/z)	0.2	-	0.35	-	0.45	-	0.5	-	0.6	-	0.8	-
	-	0.2	-	0.35	-	0.45	-	0.5	-	0.6	-	0.8

Castings steels, Inconel <1400Nmm ²												
D	ø 4	ø 4	ø 6	ø 6	ø 8	ø 8	ø 10	ø 10	ø 12	ø 12	ø 16	ø 16
ap (mm)	0.15	-	0.2	-	0.25	-	0.3	-	0.35	-	0.45	-
	-	0.12	-	0.15	-	0.2	-	0.25	-	0.3	-	0.4
Vc (mm/min)	50	-	50	-	50	-	50	-	50	-	50	-
	-	95	-	95	-	95	-	95	-	95	-	95
fz (mm/z)	0.15	-	0.25	-	0.35	-	0.4	-	0.45	-	0.6	-
	-	0.15	-	0.25	-	0.35	-	0.4	-	0.45	-	0.6

High speed steels <1100Nmm ²												
D	ø 4	ø 4	ø 6	ø 6	ø 8	ø 8	ø 10	ø 10	ø 12	ø 12	ø 16	ø 16
ap (mm)	0.17	-	0.22	-	0.27	-	0.35	-	0.42	-	0.55	-
	-	0.12	-	0.17	-	0.22	-	0.28	-	0.35	-	0.45
Vc (mm/min)	55	-	55	-	55	-	55	-	55	-	55	-
	-	100	-	100	-	100	-	100	-	100	-	100
fz (mm/z)	0.2	-	0.35	-	0.45	-	0.5	-	0.6	-	0.8	-
	-	0.2	-	0.35	-	0.45	-	0.5	-	0.6	-	0.8

CARBIDE END MILLS

4 TEETH WITH DOUBLE HELIX

OR411

Recommended for use:

< 60 HRC | < 1600 N/mm² | steel | stainless steels | cast iron

Applicable:


aluminium

Coating:

AlCrN

Geometry:

λ 35°/38°, γ 8°

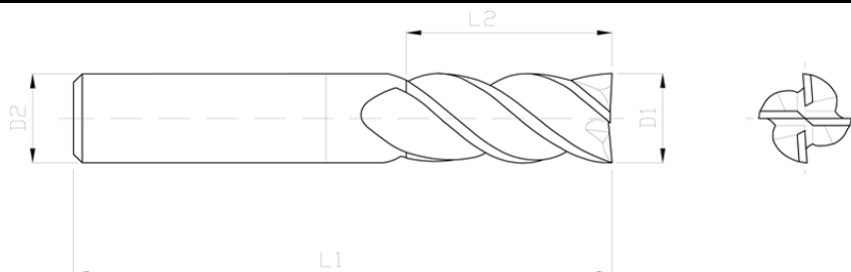

Catalogue number	Number of teeth Z	Diameter D1 h10	Corner edge K x 45°	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
OR411.020	4	2	0,05	50	5	-	-	4
OR411.030	4	3	0,07	57	8	-	-	6
OR411.040	4	4	0,07	57	12	-	-	6
OR411.050	4	5	0,07	57	13	-	-	6
OR411.060	4	6	0,07	57	15	-	-	6
OR411.080	4	8	0,12	63	19	-	-	8
OR411.100	4	10	0,2	72	24	-	-	10
OR411.120	4	12	0,2	83	28	-	-	12
OR411.140	4	14	0,2	83	28	-	-	14
OR411.160	4	16	0,2	92	35	-	-	16
OR411.200	4	20	0,3	110	42	-	-	20
OR411.250	4	25	0,3	125	55	-	-	25

Cutting conditions on page 33.

CARBIDE END MILLS 4 TEETH WITH DOUBLE HELIX - INOX

NR411

Recommended for use:

stainless steels | < 55 HRC | < 1600 N/mm²

Applicable:


copper, aluminium

Coating:

AlCrN

Geometry:

λ 38°/40°, γ 12°

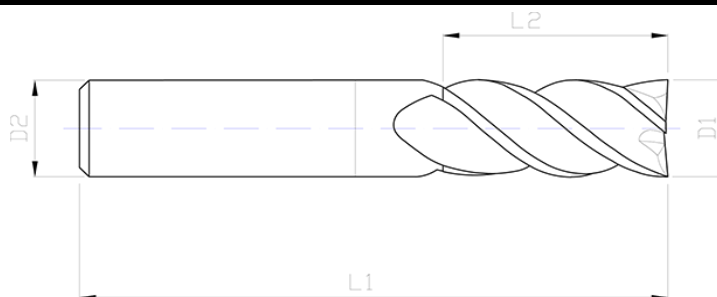

Catalogue number	Number of teeth Z	Diameter D1 h10	Corner edge K x 45°	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
NR411.030	4	3	0,07	57	10	-	-	6
NR411.040	4	4	0,07	57	12	-	-	6
NR411.050	4	5	0,07	57	15	-	-	6
NR411.060	4	6	0,07	57	17	-	-	6
NR411.080	4	8	0,12	63	21	-	-	8
NR411.100	4	10	0,2	72	26	-	-	10
NR411.120	4	12	0,2	83	31	-	-	12
NR411.160	4	16	0,2	92	35	-	-	16
NR411.200	4	20	0,3	110	42	-	-	20

Cutting conditions on page 33.

CARBIDE END MILLS 4 TEETH WITH TRIPLE HELIX FOR ALUMINIUM

AR311

Recommended for use:

aluminium and its alloys | copper | plastics

Applicable:


< 55 HRc

Coating:

without coating

Geometry:

λ 38°/40°, γ 15°

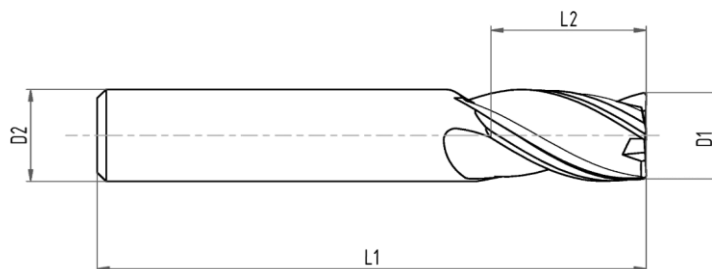

Catalogue number	Number of teeth Z	Diameter D1 h10	Corner edge K x 45°	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
AR311.030	3	3	0,07	57	10	-	-	6
AR311.040	3	4	0,07	57	12	-	-	6
AR311.050	3	5	0,07	57	13	-	-	6
AR311.060	3	6	0,07	57	15	-	-	6
AR311.080	3	8	0,12	63	19	-	-	8
AR311.100	3	10	0,2	72	24	-	-	10
AR311.120	3	12	0,2	83	28	-	-	12
AR311.160	3	16	0,2	95	35	-	-	16
AR311.200	3	20	0,3	110	42	-	-	20

Cutting conditions on page 33.


CARBIDE END MILLS 1 TEETH

AR101
AR102

Recommended for use:
aluminium and its alloys | plastics

Coating:
without coating

Geometry:
 $\lambda 25^\circ, \gamma 20^\circ$

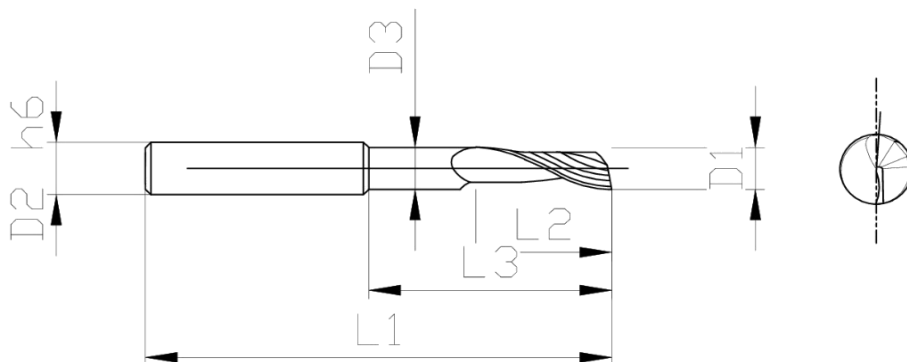

Catalogue number	Number of teeth Z	Diameter D1 h10	Corner edge K x 45°	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
AR101.030	1	3	-	54	15	-	-	6
AR102.030	1	3	-	100	15	-	-	6
AR101.040	1	4	-	54	15	-	-	6
AR102.040	1	4	-	100	15	-	-	6
AR101.050	1	5	-	54	17	-	-	6
AR102.050	1	5	-	100	17	-	-	6
AR101.060	1	6	-	60	20	-	-	6
AR102.060	1	6	-	100	20	-	-	6
AR101.080	1	8	-	63	22	-	-	8
AR102.080	1	8	-	100	22	-	-	8
AR101.100	1	10	-	72	25	-	-	10
AR102.100	1	10	-	100	25	-	-	10
AR101.120	1	12	-	83	30	-	-	12
AR102.120	1	12	-	100	35	-	-	12
AR101.140	1	14	-	92	30	-	-	14
AR102.140	1	14	-	100	35	-	-	14
AR101.160	1	16	-	92	35	-	-	16
AR102.160	1	16	-	110	40	-	-	16

Production on request.

The price is valid for the production of at least 5 pieces.

Cutting conditions on page 33.

CARBIDE END MILLS

ROUGHING 4 TEETH

OH401

Recommended for use:

< 55 HRc | < 1600 N/mm² | steel | stainless steels | cast iron

Applicable:


aluminium

Coating:

AlCrN

Geometry:

NR profile, λ 40°, γ 7°

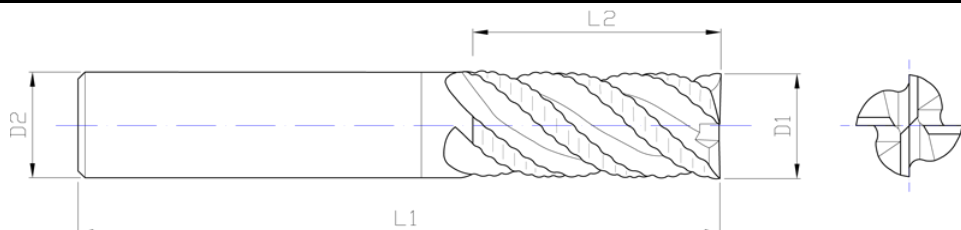

Catalogue number	Number of teeth Z	Diameter D1 h11	Corner edge K x 45°	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
OH401.050	4	5	0,15	57	13	-	-	6
OH401.060	4	6	0,15	57	13	-	-	6
OH401.080	4	8	0,2	63	19	-	-	8
OH401.100	4	10	0,2	72	22	-	-	10
OH401.120	4	12	0,25	83	26	-	-	12
OH401.160	4	16	0,35	92	32	-	-	16
OH401.200	4	20	0,4	104	42	-	-	20

Cutting conditions on page 33.

CARBIDE END MILLS

ROUGHING-FINISHING 4 TEETH

RF401

Recommended for use:


< 55 HRc | < 1600 N/mm² | steel | stainless steels | cast iron

Coating:

AlTiN

Geometry:

NR profile, λ 40°, γ 8°

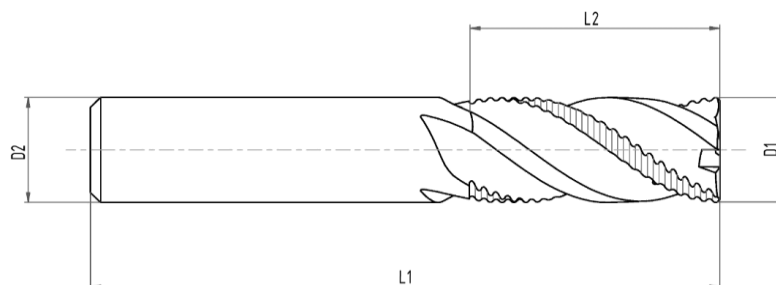

Catalogue number	Number of teeth Z	Diameter D1 h11	Corner edge K x 45°	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
RF401.060	4	6	0,15	57	15	-	-	6
RF401.080	4	8	0,2	63	22	-	-	8
RF401.100	4	10	0,2	72	26	-	-	10
RF401.120	4	12	0,25	83	30	-	-	12
RF401.160	4	16	0,35	92	36	-	-	16
RF401.200	4	20	0,4	104	42	-	-	20

Higher performance (Vc, fz) compared to carbide end mills OH401 about 30%.

Leaving a clean surface (Ra 1,6 ÷ 3,2).

CARBIDE END MILLS

FINISHING

OR601
OR602

Recommended for use:

< 60 HRC | < 1600 N/mm² | steel | stainless steels | cast iron

Applicable:

aluminium

Coating:

AlCrN

Geometry:

$\lambda 45^\circ, \gamma 7^\circ$



Catalogue number	Number of teeth Z	Diameter D1 h10	Corner edge K x 45°	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
OR601.050	6	5	0,02	54	13	-	-	5
OR601.060	6	6	0,03	57	13	-	-	6
OR602.060	6	6	0,03	70	26	-	-	6
OR601.080	6	8	0,04	63	19	-	-	8
OR602.080	6	8	0,04	90	36	-	-	8
OR601.100	6	10	0,05	72	22	-	-	10
OR602.100	6	10	0,05	100	46	-	-	10
OR601.120	6	12	0,05	83	26	-	-	12
OR602.120	6	12	0,05	110	56	-	-	12
OR601.160	6	16	0,06	92	32	-	-	16
OR602.160	6	16	0,06	130	66	-	-	16
OR601.180	6	18	0,06	92	32	-	-	18
OR801.200	8	20	0,07	104	38	-	-	20
OR802.200	8	20	0,07	140	76	-	-	20
OR1001.250	10	25	0,08	121	50	-	-	25
OR1002.250	10	25	0,08	180	92	-	-	25

Cutting conditions on page 33.

CARBIDE FINISHING END MILLS FOR HARD MATERIALS

KR

Recommended for use:

< 65 HRc | hardened steel | stainless steels | cast iron

Applicable:



< 55 HRc

Coating:

AlCrN

Geometry:

$\lambda 30^\circ - 45^\circ, \gamma 0^\circ$

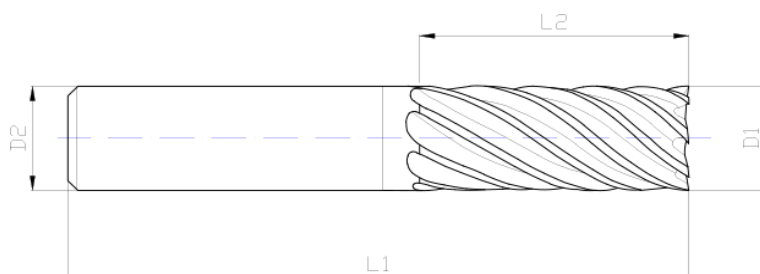

Catalogue number	Number of teeth Z	Diameter D1 e8	Corner edge K x 45°	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
KR401.030	4	3	0,02	57	12	-	-	6
KR401.040	4	4	0,02	57	13	-	-	6
KR601.050	6	5	0,02	57	15	-	-	6
KR601.060	6	6	0,03	57	16	-	-	6
KR601.080	6	8	0,04	70	22	-	-	8
KR601.100	6	10	0,05	72	25	-	-	10
KR601.120	6	12	0,05	83	28	-	-	12
KR601.140	6	14	0,06	83	30	-	-	14
KR801.160	8	16	0,06	92	35	-	-	16
KR1001.200	10	20	0,07	104	40	-	-	20
KR1002.200	10	20	0,07	135	70	85	17,8	20
KR1202.250	12	25	0,07	186	55	132	24	25

Cutting conditions on page 33.

CARBIDE BALL-NOSE END MILLS

2 TEETH

OK201
OK202

Recommended for use:

< 55 HRc | < 1600 N/mm² | steel | stainless steels | cast iron

Applicable:


aluminium

Coating:

AlTiN

Geometry:

λ 30°, γ 8°

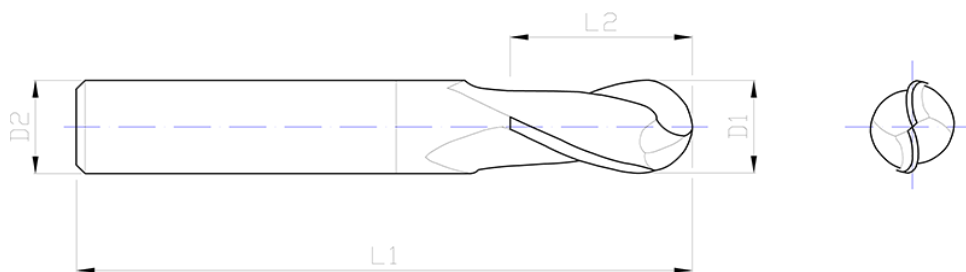

Catalogue number	Number of teeth Z	Diameter D1 h8	Corner radius R 0/-0,02	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
OK201.010	2	1	0,5	38	3	-	-	3
OK201.020	2	2	1	38	5	-	-	3
OK201.030	2	3	1,5	38	7	-	-	3
OK202.030	2	3	1,5	60	8	-	-	3
OK201.040	2	4	2	50	8	-	-	4
OK202.040	2	4	2	70	8	-	-	4
OK201.050	2	5	2,5	50	10	-	-	5
OK202.050	2	5	2,5	80	10	-	-	5
OK201.060	2	6	3	57	10	-	-	6
OK202.060	2	6	3	90	12	-	-	6
OK201.080	2	8	4	63	16	-	-	8
OK202.080	2	8	4	110	14	-	-	8
OK201.100	2	10	5	72	19	-	-	10
OK202.100	2	10	5	110	18	-	-	10
OK201.120	2	12	6	83	22	-	-	12
OK202.120	2	12	6	110	22	-	-	12
OK201.140	2	14	7	83	22	-	-	14
OK202.140	2	14	7	110	26	-	-	14
OK201.160	2	16	8	92	26	-	-	16
OK202.160	2	16	8	140	30	-	-	16
OK201.180	2	18	9	92	26	-	-	18
OK201.200	2	20	10	104	32	-	-	20
OK202.200	2	20	10	160	38	-	-	20

Cutting conditions on page 33.

CARBIDE BALL-NOSE END MILLS

4 TEETH

OK401

OK402

Recommended for use:

< 55 HRc | < 1600 N/mm² | steel | stainless steels | cast iron

Applicable:



aluminium

Coating:

AlTiN

Geometry:

$\lambda 30^\circ, \gamma 8^\circ$

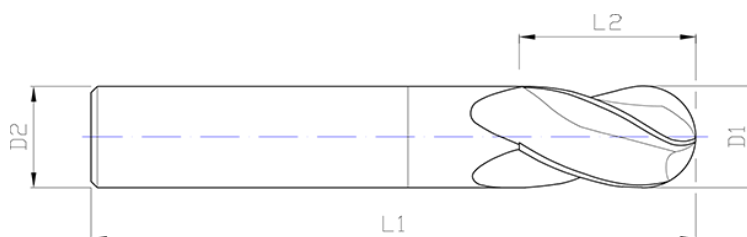

Catalogue number	Number of teeth Z	Diameter D1 h8	Corner radius R 0/-0,02	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
OK401.030	4	3	1,5	38	7	-	-	3
OK402.030	4	3	1,5	60	8	-	-	3
OK401.040	4	4	2	50	8	-	-	4
OK402.040	4	4	2	70	8	-	-	4
OK401.050	4	5	2,5	50	10	-	-	5
OK402.050	4	5	2,5	80	10	-	-	5
OK401.060	4	6	3	57	10	-	-	6
OK402.060	4	6	3	90	12	-	-	6
OK401.080	4	8	4	63	16	-	-	8
OK402.080	4	8	4	110	14	-	-	8
OK401.100	4	10	5	72	19	-	-	10
OK402.100	4	10	5	110	18	-	-	10
OK401.120	4	12	6	83	22	-	-	12
OK402.120	4	12	6	110	22	-	-	12
OK401.140	4	14	7	83	22	-	-	14
OK402.140	4	14	7	110	26	-	-	14
OK401.160	4	16	8	92	26	-	-	16
OK402.160	4	16	8	140	30	-	-	16
OK401.180	4	18	9	92	26	-	-	18
OK401.200	4	20	10	104	32	-	-	20
OK402.200	4	20	10	160	38	-	-	20

Cutting conditions on page 33.

CARBIDE BALL-NOSE END MILLS FOR HARD MATERIALS

KK201
KK202

Recommended for use:

< 65 HRc | hardened steel | stainless steels | cast iron

Applicable:


< 55 HRc

Coating:

AlCrN

Geometry:

$\lambda 20^\circ, \gamma 0^\circ$

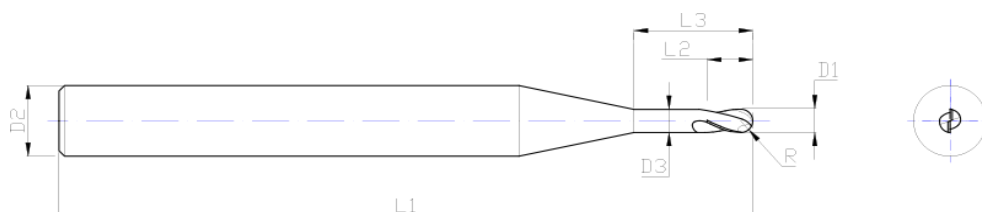

Catalogue number	Number of teeth Z	Diameter D1 h8	Corner radius R 0/-0,02	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
KK201.010	2	1	0,5	57	2	3	0,95	6
KK201.015	2	1,5	0,75	57	2,5	4,5	1,45	6
KK201.020	2	2	1	57	3	7	1,9	6
KK202.020	2	2	1	70	3	17	1,9	6
KK201.030	2	3	1,5	57	4	8	2,8	6
KK202.030	2	3	1,5	70	4	18	2,8	6
KK201.040	2	4	2	57	5	14	3,8	6
KK202.040	2	4	2	80	5	19	3,8	6
KK201.050	2	5	2,5	57	6	21	4,8	6
KK202.050	2	5	2,5	80	6	44	4,8	6
KK201.060	2	6	3	57	7	21	5,8	6
KK202.060	2	6	3	80	7	44	5,8	6
KK201.080	2	8	4	63	9	27	7,6	8
KK202.080	2	8	4	90	9	54	7,6	8
KK201.100	2	10	5	72	11	32	9,6	10
KK202.100	2	10	5	100	11	60	9,6	10
KK201.120	2	12	6	83	13	38	11,5	12
KK202.120	2	12	6	110	13	65	11,5	12
KK401.160	4	16	8	92	17	44	15,5	16
KK402.160	4	16	8	130	17	82	15,5	16

Cutting conditions on page 33.

CARBIDE BALL-NOSE END MILLS FOR EXTRA HARD MATERIALS

KK251
KK252

Recommended for use:

< 70 HRc | hardened steel

Applicable:


cast iron

Coating:

AlCrN

Geometry:

$\lambda 20^\circ, \gamma -2^\circ$

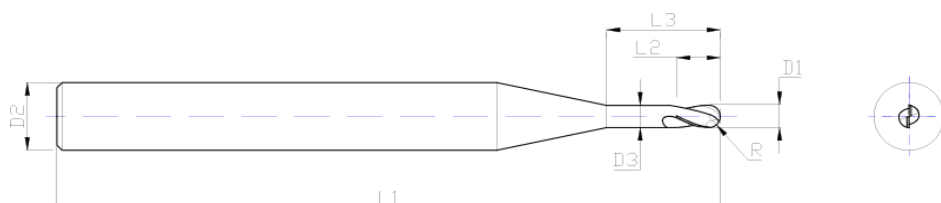

Catalogue number	Number of teeth Z	Diameter D1 h8	Corner radius R 0/-0,02	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h5
KK251.020	2	2	1	57	2	7	1,9	6
KK252.020	2	2	1	70	2	17	1,9	6
KK251.030	2	3	1,5	57	3	8	2,8	6
KK252.030	2	3	1,5	70	3	18	2,8	6
KK251.040	2	4	2	57	4	14	3,8	6
KK252.040	2	4	2	80	4	19	3,8	6
KK251.050	2	5	2,5	57	5	21	4,8	6
KK252.050	2	5	2,5	80	5	44	4,8	6
KK251.060	2	6	3	57	6	21	5,8	6
KK252.060	2	6	3	80	6	44	5,8	6
KK251.080	2	8	4	63	8	27	7,6	8
KK252.080	2	8	4	90	8	54	7,6	8
KK251.100	2	10	5	72	10	32	9,6	10
KK252.100	2	10	5	100	10	60	9,6	10
KK251.120	2	12	6	83	12	38	11,5	12
KK252.120	2	12	6	110	12	65	11,5	12
KK451.160	4	16	8	92	16	44	15,5	16
KK452.160	4	16	8	130	16	82	15,5	16

Cutting conditions on page 33.

CARBIDE END MILLS WITH CORNER RADIUS

4 TEETH

KT401

KT402

Recommended for use:

< 65 HRC | hardened steel | stainless steels | cast iron

Applicable:


< 55 HRC

Coating:

AlCrN

Geometry:

$\lambda 30^\circ, \gamma 4^\circ$

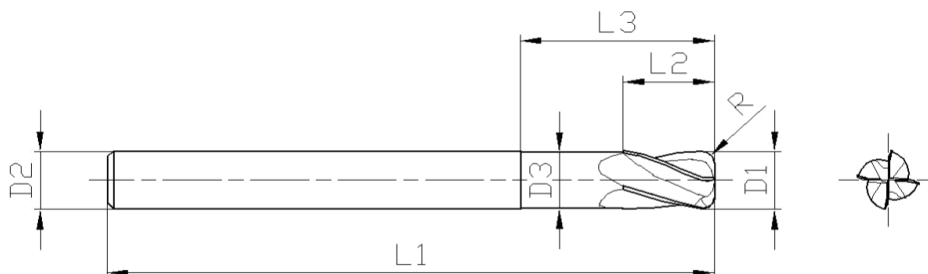

Catalogue number	Number of teeth Z	Diameter D1 h8	Corner radius R 0/-0,02	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
KT401.030.03	4	3	0,3	57	4	14	2,9	6
KT401.040.03	4	4	0,3	57	4	14,5	3,8	6
KT402.040.03	4	4	0,3	80	4	16	3,8	6
KT401.040.05	4	4	0,5	57	4	14,5	3,8	6
KT402.040.05	4	4	0,5	80	4	16	3,8	6
KT401.050.05	4	5	0,5	57	6	14,5	3,8	6
KT401.060.05	4	6	0,5	57	6	21	5,8	6
KT402.060.05	4	6	0,5	90	9	21	5,8	6
KT401.060.10	4	6	1	57	6	21	5,8	6
KT402.060.10	4	6	1	90	9	21	5,8	6
KT401.060.15	4	6	1,5	57	6	21	5,8	6
KT401.080.05	4	8	0,5	63	8	27	7,6	8
KT402.080.05	4	8	0,5	100	12	27	7,6	8
KT401.080.10	4	8	1	63	8	27	7,6	8
KT402.080.10	4	8	1	100	12	27	7,6	8
KT401.080.20	4	8	2	63	8	27	7,6	8
KT401.100.05	4	10	0,5	72	10	32	9,6	10
KT402.100.05	4	10	0,5	100	15	32	9,6	10
KT401.100.10	4	10	1	72	10	32	9,6	10
KT402.100.10	4	10	1	100	15	32	9,6	10
KT401.100.20	4	10	2	72	10	32	9,6	10
KT402.100.20	4	10	2	100	15	32	9,6	10
KT401.120.05	4	12	0,5	83	12	38	11,5	12
KT402.120.05	4	12	0,5	110	18	38	11,5	12
KT401.120.10	4	12	1	83	12	38	11,5	12
KT402.120.10	4	12	1	110	18	38	11,5	12
KT401.120.15	4	12	1,5	83	12	38	11,5	12
KT401.120.20	4	12	2	83	12	38	11,5	12
KT402.120.20	4	12	2	110	18	38	11,5	12
KT401.120.30	4	12	3	83	12	38	11,5	12
KT401.160.10	4	16	1	92	16	44	15,5	16
KT401.160.15	4	16	1,5	92	16	44	15,5	16
KT401.160.20	4	16	2	92	16	44	15,5	16

Cutting conditions on page 33.

CARBIDE NC SPOT DRILLS

NC090

NC120

Recommended for use:

< 55 HRc | < 1600 N/mm² | hardened steel | stainless steels | cast iron

Applicable:


copper, aluminium

Coating:

AlTiN

Geometry:

λ 30°

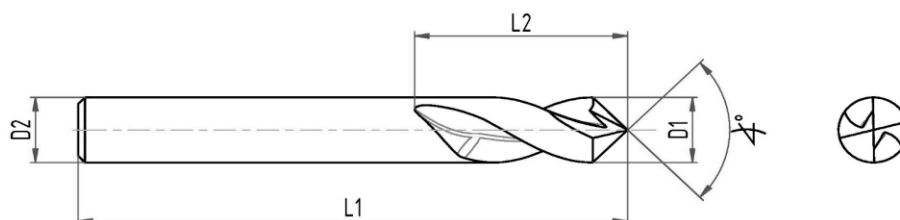

Catalogue number	Number of teeth Z	Diameter D1	λ	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
NC090.030	2	3	90	40	8	-	-	3
NC120.030	2	3	120	40	8	-	-	3
NC090.040	2	4	90	50	10	-	-	4
NC120.040	2	4	120	50	10	-	-	4
NC090.050	2	5	90	50	13	-	-	5
NC120.050	2	5	120	50	13	-	-	5
NC090.060	2	6	90	57	13	-	-	6
NC120.060	2	6	120	57	13	-	-	6
NC090.080	2	8	90	63	23	-	-	8
NC120.080	2	8	120	63	23	-	-	8
NC090.100	2	10	90	72	24	-	-	10
NC120.100	2	10	120	72	24	-	-	10
NC090.120	2	12	90	82	24	-	-	12
NC120.120	2	12	120	82	24	-	-	12
NC090.140	2	14	90	82	26	-	-	14
NC120.140	2	14	120	82	26	-	-	14
NC090.160	2	16	90	82	29	-	-	16
NC120.160	2	16	120	82	29	-	-	16
NC090.200	2	20	90	110	35	-	-	20
NC120.200	2	20	120	110	35	-	-	20

CARBIDE DRILLS 3xD WITHOUT INTERNAL COOLING

VS302

Recommended for use:

< 55 HRc | < 1600 N/mm² | hardened steel | stainless steels | cast iron

Applicable:


copper, aluminium

Coating:

AlTiN

Geometry:

λ 30°

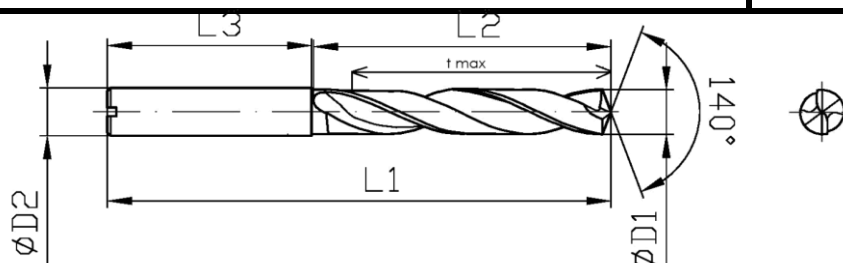

Catalogue number	Diameter D1	Overall length L1	Length of helix L2	Length of shank L3	Max. drilling depth t _{max}	Diameter tolerance m7	Shank diameter D2 h6
VS302.0300 ⇓ VS302.0370	3,0 - 3,7	62	20	36	14	0,004/0,016	6
VS302.0380 ⇓ VS302.0470	3,8 - 4,7	66	24	36	17	0,004/0,016	6
VS302.0480 ⇓ VS302.0600	4,8 - 6,0	66	28	36	20	0,004/0,016	6
VS302.0610 ⇓ VS302.0700	6,1 - 7,0	79	34	36	24	0,006/0,021	8
VS302.0710 ⇓ VS302.0800	7,1 - 8,0	79	41	36	29	0,006/0,021	8
VS302.0810 ⇓ VS302.1000	8,1 - 10,0	89	47	40	35	0,006/0,021	10
VS302.1010 ⇓ VS302.1200	10,1 - 12,0	102	55	45	40	0,007/0,025	12
VS302.1215 ⇓ VS302.1400	12,1 - 14,0	107	60	45	43	0,007/0,025	14
VS302.1420 ⇓ VS302.1600	14,1 - 16,0	115	65	48	45	0,007/0,025	16
VS302.1605 ⇓ VS302.1800	16,1 - 18,0	123	73	48	51	0,007/0,025	18
VS302.1850 ⇓ VS302.2000	18,1 - 20,0	131	79	50	55	0,008/0,029	20

Production on request.

The price is valid for the production of at least 5 pieces.

CARBIDE DRILLS 5xD WITH INTERNAL COOLING

VS501

Recommended for use:

< 55 HRC | < 1600 N/mm² | steel | stainless steels | cast iron

Applicable:


copper, aluminium

Coating:

AlTiN

Geometry:

(λ 30°)

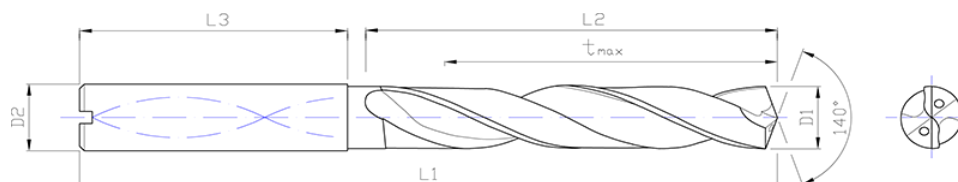

Catalogue number	Diameter D1	Overall length L1	Length of helix L2	Length of shank L3	Max. drilling depth t _{max}	Diameter tolerance m7	Shank diameter D2 h6
VS501.0300 ↓ VS501.0370	3,0 - 3,7	66	28	36	23	0,004/0,016	6
VS501.0380 ↓ VS501.0470	3,8 - 4,7	74	36	36	29	0,004/0,016	6
VS501.0480 ↓ VS501.0600	4,8 - 6,0	82	44	36	35	0,004/0,016	6
VS501.0610 ↓ VS501.0800	6,1 - 8,0	91	53	36	43	0,006/0,021	8
VS501.0810 ↓ VS501.1000	8,1 - 10,0	103	61	40	49	0,006/0,021	10
VS501.1010 ↓ VS501.1200	10,1 - 12,0	118	71	45	56	0,007/0,025	12
VS501.1210 ↓ VS501.1400	12,1 - 14,0	124	77	45	60	0,007/0,025	14
VS501.1410 ↓ VS501.1600	14,1 - 16,0	133	83	48	63	0,007/0,025	16
VS501.1610 ↓ VS501.1800	16,1 - 18,0	143	93	48	71	0,007/0,025	18
VS501.1810 ↓ VS501.2000	18,1 - 20,0	153	101	50	77	0,008/0,029	20

The price is valid only for the most commonly used diameters of drills, which we keep in stock. The current list of available items, we will provide on request.

CARBIDE MICRO DRILLS 5xD WITHOUT INTERNAL COOLING

VM502

Recommended for use:

< 55 HRc | < 1600 N/mm² | steel | stainless steels | cast iron

Applicable:


copper, aluminium

Coating:

AlTiN

Geometry:

λ 30°

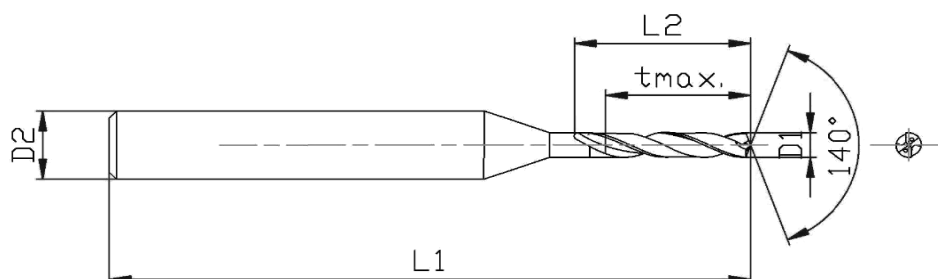

Catalogue number	Diameter D1m7	Overall length L1	Length of helix L2	Max. drilling depth t _{max}	Shank diameter D2 h6
VM502.0050 ↓ VM502.0070	0,5 - 0,7	45	4,5	3,5	3
VM502.0075 ↓ VM502.0100	0,75 - 1,0	45	6,5	5	3
VM502.0110 ↓ VM502.0150	1,1 - 1,5	54	10	7,5	3
VM502.0160 ↓ VM502.0200	1,6 - 2,0	54	13	10	3
VM502.0210 ↓ VM502.0250	2,1 - 2,5	65	17	12,5	3
VM502.0260 ↓ VM502.0290	2,6 - 2,9	65	20	15	3

Production on request.

The price is valid for the production of at least 10 pieces.

CARBIDE DRILLS 8xD WITH INTERNAL COOLING

VS801

Recommended for use:

< 55 HRC | < 1600 N/mm² | steel | stainless steels | cast iron

Applicable:


copper, aluminium

Coating:

AlTiN

Geometry:

(λ 30°)

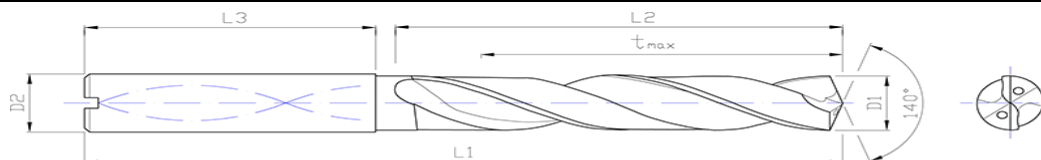

Catalogue number	Diameter D1	Overall length L1	Length of helix L2	Length of shank L3	Max. drilling depth t _{max}	Diameter tolerance m7	Shank diameter D2 h6
VS801.0300 ↓ VS801.0370	3,0 - 3,7	72	34	36	29	0,004/0,016	6
VS801.0380 ↓ VS801.0470	3,8 - 4,7	81	43	36	36	0,004/0,016	6
VS801.0480 ↓ VS801.0600	4,8 - 6,0	95	57	36	48	0,004/0,016	6
VS801.0610 ↓ VS801.0800	6,1 - 8,0	114	76	36	64	0,006/0,021	8
VS801.0810 ↓ VS801.1000	8,1 - 10,0	142	95	40	80	0,006/0,021	10
VS801.1010 ↓ VS801.1200	10,1 - 12,0	162	114	45	96	0,007/0,025	12
VS801.1250 VS801.1300 VS801.1350 VS801.1400	12,5 - 14,0	178	133	45	110	0,007/0,025	14
VS801.1450 VS801.1500 VS801.1550 VS801.1600	14,5 - 16,0	203	152	48	128	0,007/0,025	16
VS801.1650 VS801.1700 VS801.1750 VS801.1800	16,5 - 18,0	222	171	48	144	0,007/0,025	18
VS801.1850 VS801.1900 VS801.1950 VS801.2000	18,5 - 20,0	243	190	50	160	0,008/0,029	20

Production on request.

The price is valid for the production of at least 5 pieces.

CARBIDE DRILLS 12xD WITH INTERNAL COOLING

VS1201

Recommended for use:

< 55 HRC | < 1600 N/mm² | steel | stainless steels | cast iron

Applicable:


copper, aluminium

Coating:

AlTiN

Geometry:

(λ 30°)

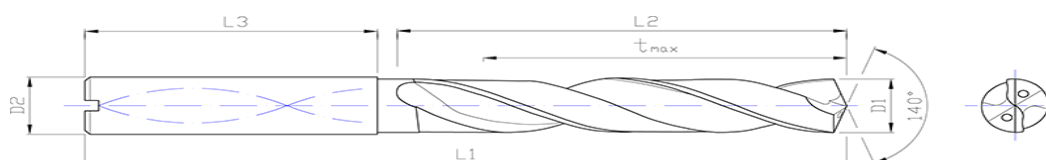

Catalogue number	Diameter D1	Overall length L1	Length of helix L2	Length of shank L3	Max. drilling depth t _{max}	Diameter tolerance m7	Shank diameter D2 h6
VS1201.0300 ↓ VS1201.0370	3,0 - 3,7	92	54	36	48	0,004/0,016	6
VS1201.0380 ↓ VS1201.0470	3,8 - 4,7	102	64	36	58	0,004/0,016	6
VS1201.0480 ↓ VS1201.0600	4,8 - 6,0	116	78	36	70	0,004/0,016	6
VS1201.0610 ↓ VS1201.0800	6,1 - 8,0	146	108	36	94	0,006/0,021	8
VS1201.0810 ↓ VS1201.1000	8,1 - 10,0	162	120	40	110	0,006/0,021	10
VS1201.1010 ↓ VS1201.1200	10,1 - 12,0	204	156	45	142	0,007/0,025	12
VS1201.1210 ↓ VS1201.1400	12,1 - 14,0	230	182	45	166	0,007/0,025	14
VS1201.1410 ↓ VS1201.1600	14,1 - 16,0	260	208	48	192	0,007/0,025	16
VS1201.1610 ↓ VS1201.1800	16,1 - 18,0	285	234	48	216	0,007/0,025	18
VS1201.1810 ↓ VS1201.2000	18,1 - 20,0	310	258	50	240	0,008/0,029	20

Production on request.

The price is valid for the production of at least 5 pieces.

CARBIDE DRILLS 4xD FOR HARD MATERIALS

VK402

Doporučené použití:


45 ÷ 65 HRC | hardened steel | cast iron

Coating:

TiSiN

Geometry:

$\lambda 15^\circ$

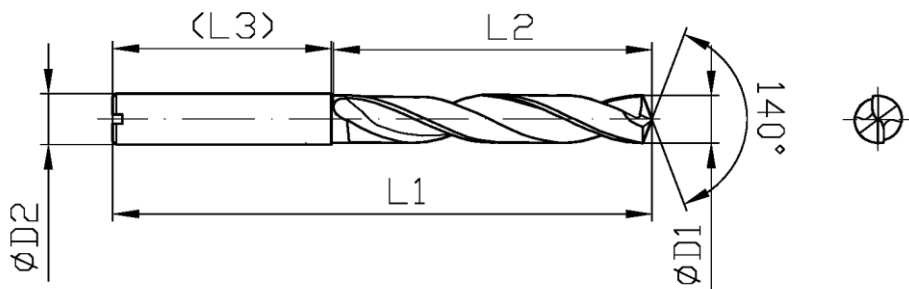

Catalogue number	Diameter D1	Overall length L1	Length of helix L2	Length of shank L3	Diameter tolerance m7	Shank diameter D2 h6
VK402.0200 ↓ VK402.0290	2,0 - 2,9	54	13	36	0,004/0,016	4
VK402.0300 ↓ VK402.0370	3,0 - 3,7	65	24	36	0,004/0,016	6
VK402.0380 ↓ VK402.0470	3,8 - 4,7	74	28	36	0,004/0,016	6
VK402.0480 ↓ VK402.0600	4,8 - 6,0	82	35	36	0,004/0,016	6
VK402.0610 ↓ VK402.0800	6,1 - 8,0	91	50	36	0,006/0,021	8
VK402.0810 ↓ VK402.1000	8,1 - 10,0	103	63	40	0,006/0,021	10
VK402.1010 ↓ VK402.1200	10,1 - 12,0	118	71	45	0,007/0,025	12
VK402.1210 ↓ VK402.1400	12,1 - 14,0	124	77	45	0,007/0,025	14
VK402.1410 ↓ VK402.1600	14,1 - 16,0	133	83	48	0,007/0,025	16

Production on request.

The price is valid for the production of at least 5 pieces.

CARBIDE CHAMFER MILLS

SINGLE END 90°

JS401

Recommended for use:

< 55 HRc | < 1600 N/mm² | steel | stainless steels | cast iron

Applicable:


copper, aluminium

Coating:

AlTiN

Geometry:

λ 0°

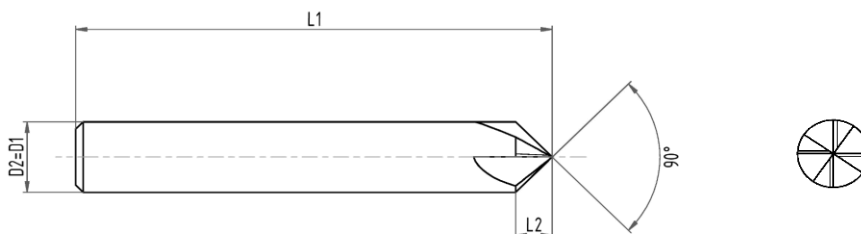

Catalogue number	Number of teeth Z	Diameter D1	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
JS401.030	4	3	50	1,5	-	-	3
JS401.040	4	4	54	2	-	-	4
JS401.050	4	5	54	2,5	-	-	5
JS401.060	4	6	57	3	-	-	6
JS401.080	4	8	59	4	-	-	8
JS401.100	4	10	65	5	-	-	10
JS401.120	4	12	74	6	-	-	12

CARBIDE CHAMFER MILLS

DOUBLE END 90°

OS401

OS402

Recommended for use:

< 55 HRc | < 1600 N/mm² | steel | stainless steels | cast iron

Applicable:


copper, aluminium

Coating:

AlTiN

Geometry:

λ 0°

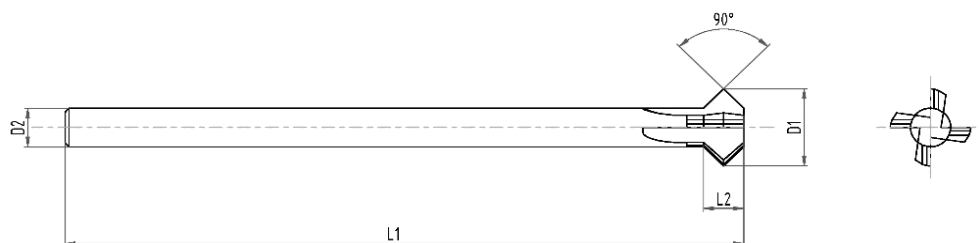

Catalogue number	Number of teeth Z	Diameter D1	Overall length L1	Length of edge L2	Reduced neck length L3	Reduced neck diameter D3	Shank diameter D2 h6
OS402.030	4	3	75	2	12	2	3
OS402.040	4	4	83	2,7	17,5	2,9	4
OS402.050	4	5	100	3	19,5	2,9	5
OS401.060	4	6	54	-	20,5	3,9	6
OS402.060	4	6	100	4	20,5	3,6	6
OS401.080	4	8	83	-	40	6	8
OS402.080	4	8	100	2	-	-	6
OS402.100	4	10	100	4	-	-	6
OS402.120	4	12	100	6	-	-	6

SPECIAL CARBIDE TOOLS

MILLING


According to a tool drawing or requirement of machining.
Diameter range of tool: 0,2 mm - 40 mm.
Coating on request.



FOR GRAPHITE



FOR TROCHOIDAL
MILLING



FOR WOOD, PLASTIC,
LAMINATE



FOR THREADING



FOR DEBURRING



FOR ENGRAVING



CONCAVE



CROWN



PROFILED

SPECIAL CARBIDE TOOLS

DRILLING



DRILLS FOR
HARDENED MATERIAL



LONG DRILLS



STEP DRILLS



COUNTERSINKS



REAMERS




DRILL-REAMERS

TURNING, PLASTIC WORKING ETC.



TURNING TOOLS



ADJUSTMENT OF CUTTING INSERTS



PUNCHES




CYLINDRICAL GRINDING

RECOMMENDED CUTTING CONDITIONS FOR CARBIDE END MILLS


	Machined material	Material strength N/mm ²	Cutting speed V _c (m/min)	Feed per tooth f _z (mm)				
				Ø 2-3	Ø 4-5	Ø 6-10	Ø 12-16	Ø 20
Cutting speed V_c:	Free cutting steels	< 600	200	0,02	0,04	0,05	0,08	0,12
	General construction steels							
Revolutions n:	General construction steels	< 750	180	0,02	0,03	0,04	0,07	0,08
	Non alloyed steel castings Low alloyed steel castings							
Rate of feed V_f:	Heat resistant steels	< 1100	100	0,02	0,025	0,04	0,07	0,08
	Alloyed steel castings							
Feed per tooth f_z:	Castings steels	< 1400	20	0,01	0,01	0,02	0,04	0,05
	Inconel							
Feed per revolutions f:	Nitriding steels	< 950	130	0,02	0,03	0,04	0,07	0,08
	Cementation steels							
Rate of feed V_f:	Tool steels	< 1400	90	0,01	0,01	0,02	0,035	0,05
	High speed steels							
Feed per tooth f_z:	Heat resistant alloys	< 850	60	0,01	0,015	0,02	0,04	0,05
	Hardened steels							
Feed per revolutions f:	Hardened steels	< 70 HRC	65	0,01	0,015	0,02	0,03	0,04
	Stainless steels							
Rate of feed V_f:	Grey cast iron	< 240 HB	150	0,02	0,03	0,05	0,08	0,12
	Malleable cast iron							
Feed per tooth f_z:	Ductile cast iron	< 800 HB	110	0,01	0,02	0,04	0,07	0,1
	Alloyed cast iron							
Rate of feed V_f:	Aluminium alloys <10%Si	< 400	800	0,02	0,03	0,055	0,085	0,12
	Aluminium alloys >10%Si							
Rate of feed V_f:	Copper	< 500	280	0,01	0,02	0,04	0,07	0,1
	Copper alloys							

Coefficients for reducing of the feed rate f₁:


$$\begin{aligned} a_e &= 0,1 \times D1 \\ a_p &= 1,5 \times D1 \\ f_1 &= 1 \end{aligned}$$

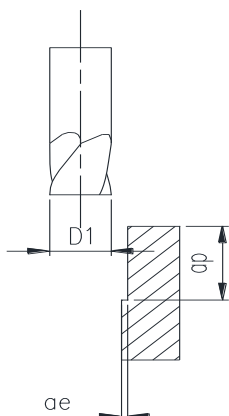

$$\begin{aligned} a_e &= 0,25 \times D1 \\ a_p &= 1,5 \times D1 \\ f_1 &= 0,8 \end{aligned}$$

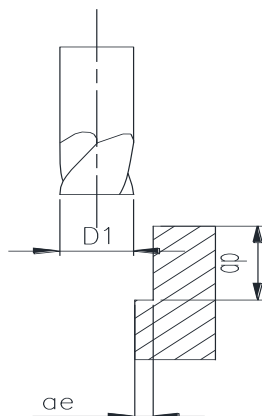

$$\begin{aligned} a_e &= 0,5 \times D1 \\ a_p &= 1,5 \times D1 \\ f_1 &= 0,5 \end{aligned}$$

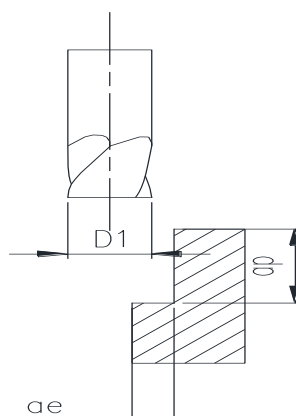

$$\begin{aligned} a_e &= D1 \\ a_p &= 0,5 \times D1 \\ f_1 &= 0,5 \end{aligned}$$

